


HS-540 Vibration Module

Key Features

- Converts 0-10V to 4-20mA or 4-20mA to 0-10V
- Isolated
- Din Rail Mounted
- Compact design

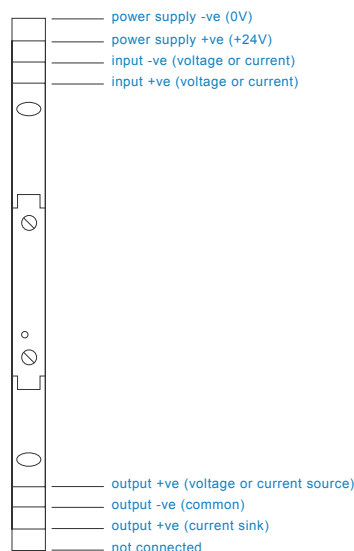

Technical Performance

Input	0-10V or 4-20mA
Output	4-20mA or 0-10V
Output Linearity Error	±0.03% typical
Temperature Coefficient	±100 ppm/°C

Mechanical

Case Material	Plastic
Mounting	DIN Rail TS35 (Top Hat)
Dimensions	102 x 93 x 7 mm (H x D x W)
Connections	Screw Clamp
Conductor Size	0.5 to 4.0 mm
Weight	60 gms (nom)


Electrical

Power Input	+24 V DC at 50 mA (HS-570 Power Supply Module)
Supply Current	30mA max.
Input Impedance	500 KOHms
Isolation Voltage	1 KV

Environmental

Operating Temperature Range	0 to 55 °C
Installation Category (IEC664)	II
Equipment Class (IEC536)	III
EMC	EN61326-1:2013

How To Order

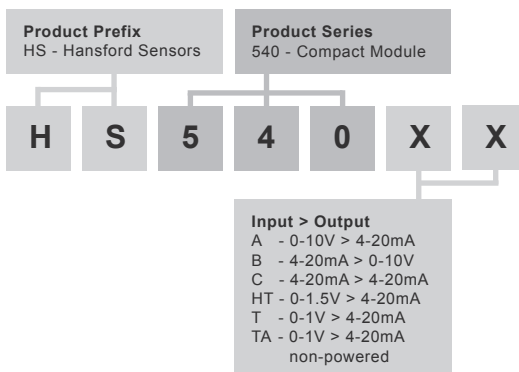

We reserve the right to alter the specification of this product without prior notice



Vertriebspartner für Deutschland



beta SENSORIK GmbH
 Hummendorfer Straße 74 · 96317 Kronach
 Telefon 09261 96607-0 · Fax 09261 96607-11
 briefkasten@betasensorik.de · www.betasensorik.de



TS050.4